

HYBRID SERIES

Snowblowers



	N60-240HYB	N74-250HYB	N82-260HYB N82-260HYB-EXT32	N92-280HYB N92-280HYB-EXT36	N100-310HYB N100-310HYB-EXT40
RECOMMENDED HORSEPOWER (HP PTO)	20 to 40	25 to 50	40 to 75	60 to 90	85 to 140
CUTTING WIDTH	60"	74"	82"	92"	100"
EXTENSIBLE PANEL	-	-	- / 32"	- / 36"	- / 40"
CUTTING HEIGHT	28"	29"	30 3/4"	33"	35 3/4"
IMPELLER RPM	540	540	540	540	540
IMPELLER DIAMETER	24"	25"	26"	28 1/2"	31"
IMPELLER DEPTH	7 1/2"	9"	11"	12"	14 1/4"
NUMBER OF BLADES	4	4	4	4	5
IMPELLER SHAFT DIAMETER	1 1/4"	1 9/16"	1 9/16"	1 9/16"	2"
BALANCED IMPELLER	Std	Std	Std	Std	Std
DRUM CENTER HEIGHT	20 1/4"	21 1/2"	22 1/2"	24 1/4"	26 1/2"
CHUTE ROTATION BY HYDRAULIC MOTOR	Std.	Std.	Std.	Std	Std
HYDRAULIC DEFLECTOR	Std.	Std.	Std.	Std	Std
MANUAL DEFLECTOR	Opt.	Opt.	Opt.	Opt.	Opt.
CYLINDER FOR CHUTE DEFLECTOR	2" X 4"	2" X 4"	2" X 6"	2 1/2" X 8"	2 1/2" X 8"
SEMI-INDUSTRIAL CHUTE (2 DEFLECTORS)	Std	Std	Std	Std	Std
AUGER DIAMETER	14"	15"	16"	17"	18"
BALANCED AUGER	Std	Std	Std	Std	Std
REVERSIBLE CARBON STEEL CUTTING EDGE	Std	Std	Std	Std	Std
REVERSIBLE HARDOX 450 STEEL CUTTING EDGE	Opt.	Opt.	Opt.	Opt.	Opt.
REVERSIBLE STAINLESS STEEL CUTTING EDGE	Opt.	Opt.	Opt.	Opt.	Opt.
TIVAR CUTTING EDGE	Opt.	Opt.	Opt.	Opt.	Opt.
MOBILE LATERAL RUBBER SKID SHOES	Std	Std	Std	Std	Std
STORAGE FOOT	Std	Std	Std	Std	Std
HOSES HOLDER	Std	Std	Std	Std	Std
DRIVING CHAIN NUMBER	60	60	80	80	100
CHAIN GUARD	Std	Std	Std	Std	Std
NUMBER OF SAFETY BOLTS	2	2	2	3	3
KEY FOR DRIVING SHAFT ADJUSTMENT	Std	Std	Std	Std	Std
BEARING DUCTILE IRON CASING	Std	Std	Std	Std	Std
SHAFT PTO STD	T20	T40	T60	T60	T80
HITCH CATEGORY (QH = QUICK HITCH)	1, 1 QH	1, 1 QH	1 & 2 QH	2 QH	2 QH
APPROX WEIGHT (LB)	860	1 063	1 265	1 709	2 256

* The weight includes the chute, the cylinder for chute deflector, the rotation kit and the PTO shaft.
Specifications are subject to change without notice.

© Normand Company Ltd. All rights reserved 2024.

HYBRID SERIES

Snowblowers



THE MOST PERFORMING AND ROBUST SNOWBLOWER IN ITS CATEGORY!



Normand Co. Ltd
cienormand.com




340 Tache Street
Saint-Pascal (QC) Canada G0L 3Y0
418 492-2712 • 1 888 666-7626
normand@cienormand.com

N60-240HYB | N74-250HYB | N82-260HYB | N92-280HYB | N100-310HYB

HYBRID SERIES



N60-240HYB



Mobile lateral rubber skid shoes (All models)

N74-250HYB



N82-260HYB | N82-260HYB-EXT32




The following components are made of HARDOX 450 steel:

- Structure
- Sides and reinforcements of sides
- Blades of the auger
- Triple bottom
- 3-points
- Lining behind the blades of auger


HYBRID SERIES



N92-280HYB | N92-280HYB-EXT36

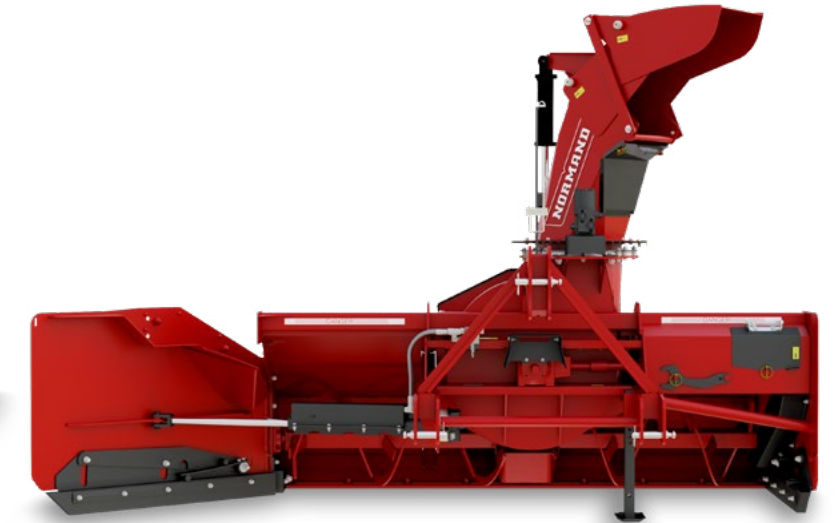

N100-310HYB | N100-310HYB-EXT40

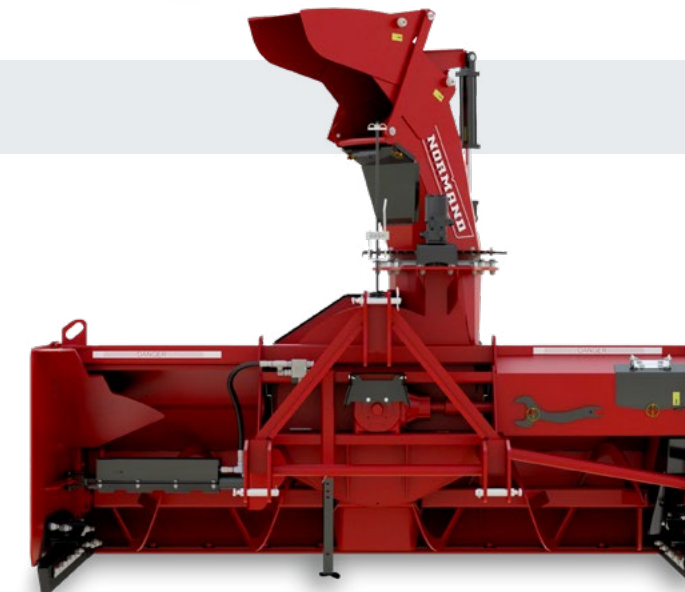

Reversible cutting edges:

- Carbon steel (Reversible)
- Stainless steel (Reversible)
- HARDOX 450 steel (Reversible)
- Tivar 88